

ATELIER REFENDAGE SERVICE



www.ars-metal.com

Creil (60) Besançon (25)
 +33 (0)3 44 61 21 60 +33 (0)3 81 48 13 00
 ars.creil@ars-metal.com ars.besancon@ars-metal.com

EXTRA ALLIAGE



	AISI	EN	ép mini	ép maxi	janv-24	févr-24	mars-24	avr-24	mai-24	juin-24	juil-24	août-24	sept-24	oct-24	nov-24	déc-24	janv-25
Laminé à Froid	430	1.4016	0,40	3	1,019	1,013	1,023	1,006	1,034	1,043	1,035	1,036	1,022	0,999	1,022	1,035	1,058
	304	1.4301	0,40	3	2,005	1,992	2,060	2,157	2,200	2,350	2,309	2,160	2,051	2,023	2,114	2,054	2,093
	304 L	1.4307	0,40	3	2,005	1,992	2,060	2,157	2,200	2,350	2,309	2,160	2,051	2,023	2,114	2,054	2,093
	321	1.4541	0,40	3	2,187	2,171	2,251	2,370	2,417	2,590	2,543	2,369	2,245	2,218	2,325	2,252	2,294
	316 L	1.4404	0,40	3	3,195	3,299	3,364	3,513	3,558	3,792	3,819	3,617	3,405	3,371	3,495	3,443	3,489
	316 TI	1.4571	0,40	3	3,243	3,346	3,416	3,572	3,618	3,858	3,883	3,675	3,458	3,424	3,553	3,498	3,544
	305	1.4303	0,40	3	2,424	2,405	2,496	2,644	2,695	2,901	2,846	2,636	2,493	2,467	2,594	2,504	2,550
	304 L	1.4306	0,40	3	2,231	2,216	2,293	2,411	2,458	2,631	2,585	2,410	2,287	2,260	2,366	2,294	2,336
	441	1.4509	0,40	3	1,279	1,273	1,287	1,269	1,295	1,305	1,297	1,298	1,284	1,259	1,281	1,294	1,317
	316SL	1.4435	0,40	3	3,590	3,719	3,790	3,967	4,014	4,285	4,322	4,090	3,844	3,809	3,952	3,893	3,942
Feuillard de précision	430	1.4016	0	< 0,4	1,253	1,246	1,258	1,237	1,272	1,283	1,273	1,274	1,257	1,229	1,257	1,273	1,301
	304	1.4301	0	< 0,4	2,466	2,450	2,534	2,653	2,706	2,891	2,840	2,657	2,523	2,488	2,600	2,526	2,574
	301	1.4310	0	3	2,352	2,337	2,416	2,524	2,572	2,744	2,697	2,528	2,401	2,365	2,471	2,402	2,446
	304 L	1.4307	0	< 0,4	2,466	2,450	2,534	2,653	2,706	2,891	2,840	2,657	2,523	2,488	2,600	2,526	2,574
	321	1.4541	0	< 0,4	2,690	2,670	2,769	2,915	2,973	3,186	3,128	2,914	2,761	2,728	2,860	2,770	2,822
	316 L	1.4404	0	< 0,4	3,930	4,058	4,138	4,321	4,376	4,664	4,697	4,449	4,188	4,146	4,299	4,235	4,291
	316Ti	1.4571	0	3	3,989	4,116	4,202	4,394	4,450	4,745	4,776	4,520	4,253	4,212	4,370	4,303	4,359
	305	1.4303	0	< 0,4	3,054	3,030	3,145	3,331	3,396	3,655	3,586	3,321	3,141	3,108	3,268	3,155	3,213
	304 L	1.4306	0	< 0,4	2,744	2,726	2,820	2,966	3,023	3,236	3,180	2,964	2,813	2,780	2,910	2,822	2,873
	441	1.4509	0	< 0,4	1,573	1,566	1,583	1,561	1,593	1,605	1,595	1,597	1,579	1,549	1,576	1,592	1,620
	316 SL	1.4435	0	< 0,4	4,256	4,382	4,460	4,691	4,729	5,082	5,176	4,853	4,558	4,498	4,686	4,659	4,734
	Fil Tréfilé	302	1.4310	0	100	2,606	2,480	2,490	2,580	2,636	2,828	2,768	2,602	2,490	2,437	2,522	2,441
304		1.4301	0	100	2,748	2,618	2,629	2,732	2,791	3,000	2,934	2,750	2,627	2,574	2,669	2,580	2,885
430		1.4016	0	100	1,283	1,187	1,187	1,177	1,177	1,200	1,195	1,216	1,209	1,160	1,137	1,144	1,432
316L		1.4404	0	100	4,245	4,235	4,234	4,420	4,477	4,835	4,846	4,580	4,331	4,257	4,398	4,321	4,635
304L		1.4307	0	100	2,988	2,852	2,865	2,994	3,056	3,295	3,219	3,001	2,859	2,805	2,920	2,815	3,122

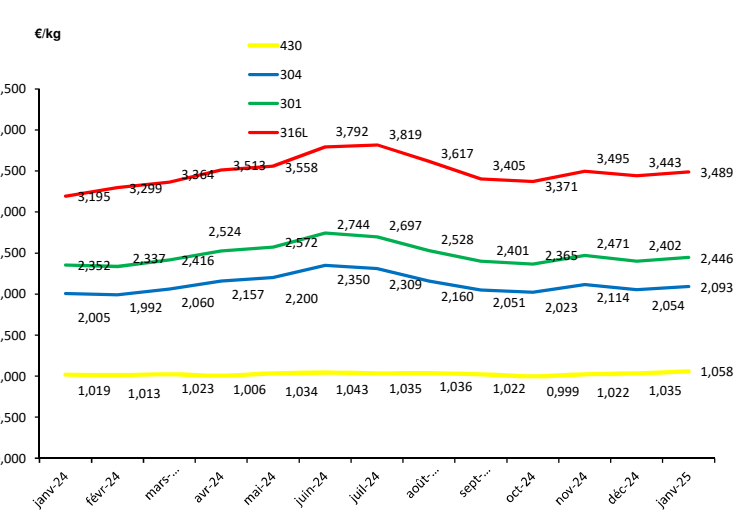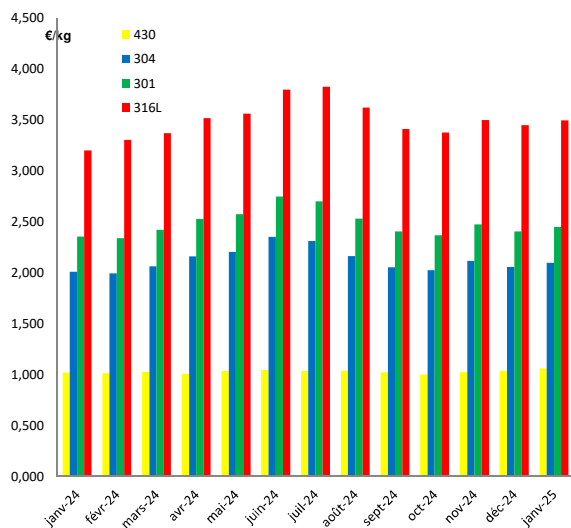

€ / kg